

FGA4400-FM04 Series
C-Band DWDM FGA Full Function Module
Fixed Gain EDFA Module

Technical Specification

CONTENT

1.0 PRODUCT DESCRIPTION.....	1
2.0 PRODUCT FEATURE.....	2
3.0 MAIN APPLICATION.....	2
4.0 RELATED PRODUCT.....	3
5.0 TECHNICAL INDEX.....	4
6.0 OPTICAL/ELECTRICAL SCHEMATIC.....	5
7.0 FMO4 MODULE CHASSIS SIZE.....	6
8.0 ELECTRICAL PIN ASSIGNMENTS.....	7
9.0 PRODUCT SERIES.....	8
10.0 ORDERING INFORMATION.....	8

1.0 PRODUCT DESCRIPTION

Huatai FGA4400-FM04 series is a fixed gain Full Functional EDFA module which is specifically designed for C-Band DWDM optic transmission system, accord with various communication technology requirements of 44 channels DWDM system. It adopts nowadays excellent optical performance, advanced electronic control technology and complete software functionalities. Excellent total integration electronic transient control technology ensures amplifier to achieve the locking of optimal flat gain (OFG) in large dynamic input optical power range.

FGA4400-FM04 Full Functional EDFA module, using $100 \times 130 \times 19$ mm , a single set of + 5VDC power supply, low power consumption.

FGA4400-FM04 is suitable for DWDM booster amplifier (BA) and DWDM preamplifier (PA).

2.0 PRODUCT FEATURE

- Accord with the various communication technology requirements of 44 channels DWDM system
- Excellent optical performance
- Excellent total integration electronic transient control technology
- Optimal flat gain (OFG) locking (GF<1.0dB)
- Low noise figure
- Standard RS232 communication interface.
- Low power consumption
- Excellent P/P ratio in area

3.0 MAIN APPLICATION

- C-Band 44 channels DWDM booster amplifier
- C-Band 44 channels DWDM preamplifier
- Long distance trunk network
- MAN or access network
- All kinds of SDH/PDH transmission system
- FTTx PON

4.0 RELATED PRODUCT

- FGA4400-FM02 (70×90×15mm)
- FGA4400-FM05 (FGA)
- HWA4500 (VGA)
- HWA4700 (VGA with MSA)
- HWA4100 (WBA),HWA4200 (WLA),HWA4300 (WPA)
-

5.0 SOFTWARE FUNCTION MONITORING AND ALARM


Functions	In-Service Firm ware Upgrades
	Auto Shut Down
	Fixed Gain Control mode and Power limiting
	Output Power Control Mode (APC)
	Pump Current Control Mode (ACC)
	Pump Maximum working Current limit Protection (APC)
Monitors	Total Input Power
	Total Output Power
	Pump Status
	Chassis Temperature
Alarms	Loss-of-Signal Alarm
	Chassis Temperature Alarm
	Pump Temperature Alarm
	Pump Bias Alarm

6.0 TECHNICAL INDEX


Performance			Index			Supplement
			Min.	Typ.	Max.	
Optical feature	Work wavelength range(λ)	(nm)	1529.16		1563.86	ITU 88CH
	No. of Working channel	(CH)	1	44		
	Total input power range (Pi)	(dBm)	-30		+3	
	Saturation Output Power(Po)	(dBm)	14		22	Enhanced version
	Optimal flat gain (OFG) 2)	(dB)	18		33	Enhanced version
	Gain flatness	(dB)		0.7	1.0	Peak to Peak
	Noise figure	(dB)		4.7	5.5	Max.output, Max gain
	Monitoring accuracy of input optical power	(dB)	-0.5		+0.5	
	Monitoring accuracy of input optical power	(dB)	-0.5		+0.5	
	Average gain accuracy	(dB)	-0.5		+0.5	
	Gain stability	(dB)	-0.25		+0.25	
	Polarization dependence gain	(dB)			0.3	
	Polarization dependence loss	(dB)			0.3	
	Polarization mode dispersion	(ps)			0.3	
	Input/output optic isolation	(dB)	30			
	Pump leakage power	(dBm)			-30	
	Echo loss	(dB)	45			UPC
			55			APC
Wavelength range of optic management channel	(nm)	1500	1510	1520		

Transient feature	Transient suppression time	(μ s)			700	15dB Add/Drop
	Transient Overshoot	(dB)	-1.5		+1.5	15dB Add/Drop
	Transient gain changes	(dB)	-0.5		+0.5	
General feature	Communication interface		RS232			
	Fiber type		Coming SMF-28™ or equivalent			
	Pigtail buffer diameter	(μ m)		900		
	Pigtail length	(mm)		1000		
	Power supply	(V)	+4.75	+5	+5.25	220VAC
	Power consumption	(W)			30	
	Working temp.	(°C)	-5		+70	
	Storage temp.	(°C)	-40		+85	
	Working relative humidity	(%)	+5		+95	
	Size (W)×(D)×(H)	(mm)	100×130×19			

7.0 OPTICAL/ELECTRICAL SCHEMATIC

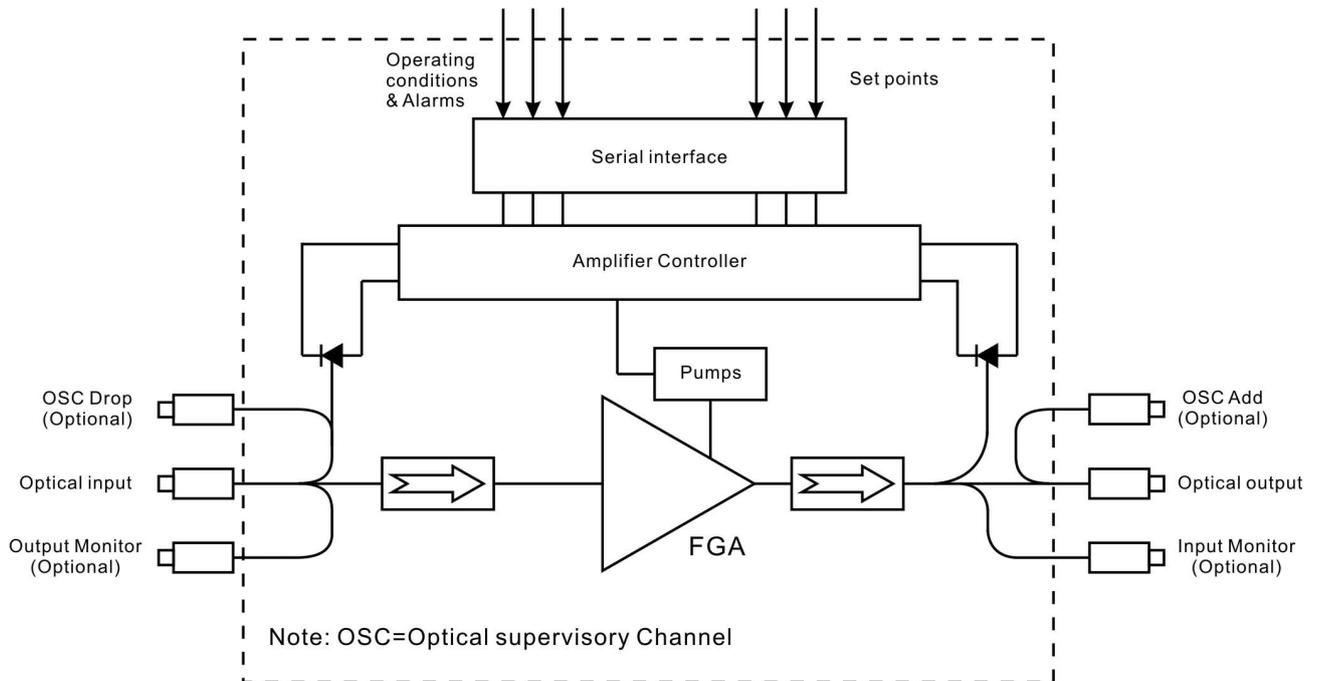

8.0 FMO4 MODULE CHASSIS SIZE

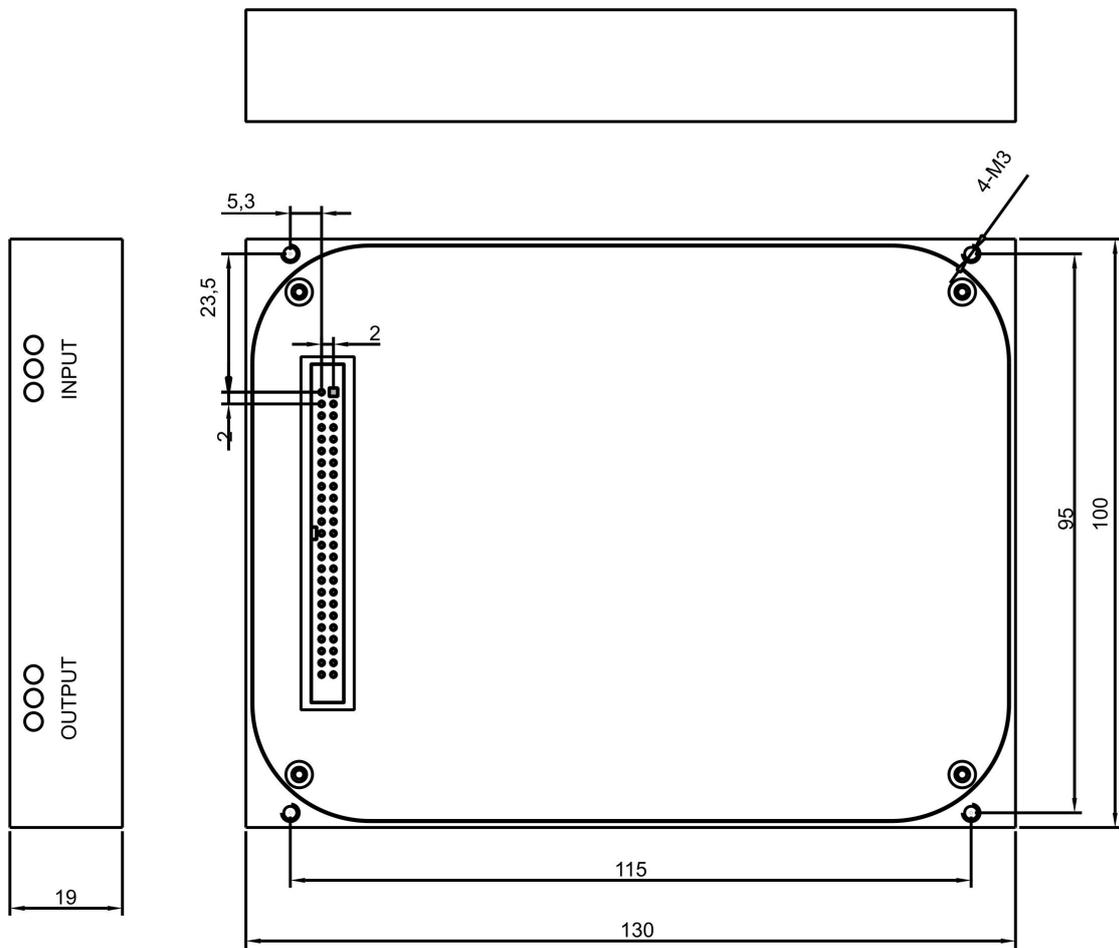

9.0 Electrical Pin Assignments

Pins	Description	Pins	Description
1	Power supply	2	Power supply
3	Power supply	4	Power supply
5	Power supply	6	Power supply
7	Ground	8	Ground
9	Ground	10	Ground
11	Reserved (do not connect)	12	Output reflection alarm
13	Ground	14	Resent input
15	Serial input	16	Serial output
17	Pump current alarm	18	Stage 1 input LOS alarm
19	Ground	20	Ground
21	Reserved (do not connect)	22	Reserved (do not connect)
23	Reserved (do not connect)	24	Reserved (do not connect)
25	Ground	26	Reserved (do not connect)
27	Stage 2 input LOS alarm	28	Ground
29	Stage 2 output/Gain alarm	30	Ground
31	Ground	32	Ground
33	Case temperature alarm	34	Stage 1 output / Gain alarm
35	Pump temperature alarm	36	Pin is absent (Polarization key)
37	Amplifier disable input	38	Output Power mute input
39	I2C SCL (Optional)	40	I2C SDA (Optional)
41	Ground	42	Ground
43	Ground	44	Ground
45	Power supply	46	Power supply
47	Power supply	48	Power supply
49	Power supply	50	Power supply

10.0 PRODUCT SERIES

Model	Saturation output optical power (dBm)	Optimal Flat Gain (dB)	Gain flatness (dB)	Optical port monitoring mode	OSC Optical port mode
FGA4414-G □□-FM04	14	18,20,22, 24,27,33 Optional	<1.0	1, MO: With output monitoring 2, MI: With input monitoring 3, MIO: With input and output monitoring	1, OD: OSC / Drop 2, OA: OSC / Add 3, ODA:OSC /Drop & Add
FGA4418-G □□-FM04	18				
FGA4420-G □□-FM04	20				
FGA4422-G □□-FM04	22				

11.0 ORDERING INFORMATION

FGA 4 4 □□ - G□□ - FM 04 / □□ - M□□ - O□□

C-Band DWDM Fixed Gain Optical Amplifier Module	Operation wavelength		Product type		Max. Output power		Gain		Module type	Best gain flatness	Connncrctor		Monitor options		OSC optical port options			
	4	C-Band (1528~1564)	4	Fixed Gain Amplifier(BA)	14	14dBm	18	18dB			FM	Full function module	04	100 x 130 x 20mm	LP	LC/UPC	MO	With output monitor
					18	18dBm	20	20dB					LA	LC/APC	MI	With input monitor	OA	OSC/Add
					20	20dBm	22	22dB					SP	SC/UPC				
					22	22dBm	24	24dB					SA	SC/APC	MIO	With input & output monitor	ODA	OSC/Drop & Add
							27	27dB					FP	FC/UPC				
							33	33dB					FA	FC/APC				