

HFC optical receiver • 9940 Series

Technical Specification

Hangzhou Huatai Optic Tech. CO., LTD

CONTENT

1.0 PRODUCT DESCRIPTION.....	1
2.0 PRODUCT FEATURE.....	1
3.0 CIRCUIT BLOCK DIAGRAM.....	2
4.0 PRODUCT SERIES.....	2
5.0 TECHNICAL INDEX.....	3
5.1 Downlink.....	3
5.2 Uplink.....	4
5.3 Network management response part.....	4
5.4 CWDM wavelength optional(return path Optical transmitter module).....	4


1.0 PRODUCT DESCRIPTION

Huatai Optical node is the earliest manufacturing that adopts AUGAT aluminum die-casting to make 4 ports optical communication platform. The platform is gradable and has become the main device that widen HFC subscribers access network. It is widely used in FTTB, FTTC. Its RF output is driven by one power-doubling module. It can be installed with 2 receivers, 4 transmitters and 2 power supplies (main and back-up), which can improve the system redundancy.

2.0 PRODUCT FEATURE

- Large Aluminum housing with die-casting technology, surface passivation, good performance in heat-conducting, antismog
- Separated 4 ports with high output level, each port can be managed remotely
- Standard SNMP. Built-in responder. Remote management and configuration
- 4 separated return channels can be configured with reverse noise restrain (tri-status switch), controlled remotely
- The forward channel can be configured with 2 Optical receiving modules as redundant standby and dual optical receiving
- 4 return path Optical transmitting modules are optional, adopting CWDM to return in single fiber
- Dual back-up power supply optional, anti-surge. High reliable ability in anti-thunderbolt and anti-surging

3.0 CIRCUIT BLOCK DIAGRAM

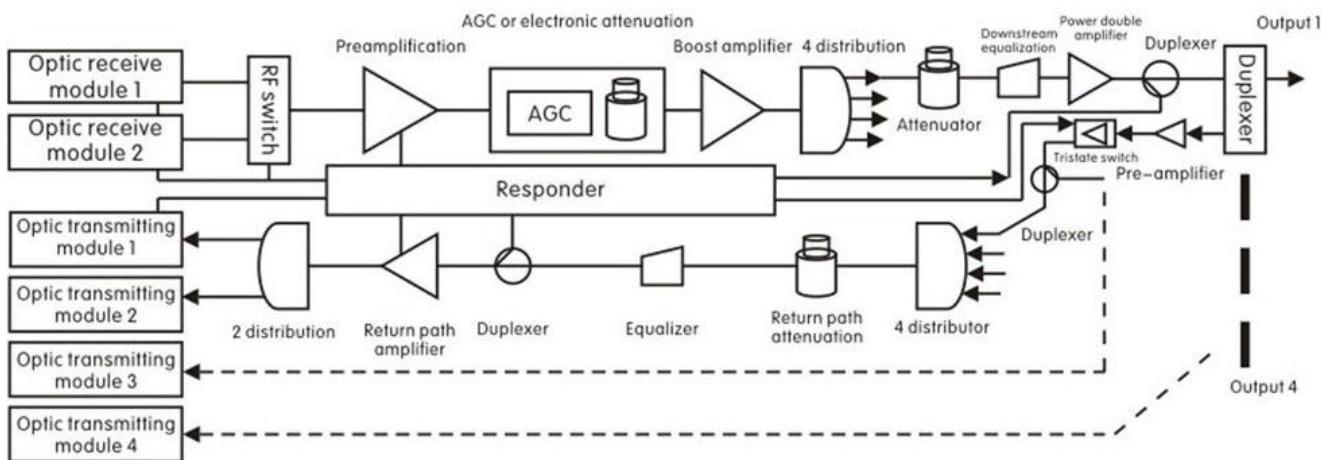

4.0 PRODUCT SERIES

- 9940-101(1 receive, 1 power)
- 9940-111(1 receive, 1 transmit, 1 power)
- 9940-121(1 receive, 2 transmit, 1 power)
- 9940-222(2 receive, 2 transmit, 2 power)
- 9940-242(2 receive, 4 transmit, 2 power)

5.0 TECHNICAL INDEX

5.1 Downlink

Performance			Index	Supplement
Optical feature	Operating wavelength	(nm)	1280 ~ 1610	Typical application 1550nm±10nm
	Received power	(dBm)	+3 ~ -5	
	Responsibility	(A / W)	1310nm≥0.85	
			1550nm≥0.9	
	Optical return loss	(dB)	≥55	
RF feature	Optical fiber connector		SC/APC	
	Operating bandwidth	(MHz)	47~862	
	Flatness	(dB)	≤±1.0	
	Output level	(dB μ V)	112	
	Output level control	(dB)	0~18	
	Return loss	(dB)	≥14	47~862MHz
	Output impedance	(Ω)	75	
	Number of output port		4	
Link feature	RF connector		F-Female	
	Test channel	CH	PAL-D/59CH	NTSC/77CH
	OMI	(%)	3.8	Pin=0dBm
	CNR	(dB)	≥51	
	CTB	(dB)	≤-65	
	CSO	(dB)	≤-60	
General feature	HUM	(dB)	≤-60	
	Power supply	(V)	60VAC	
	Power consume	(W)	≤3	+12VC, 190mA
	Operating temp.	(°C)	-20~+60	
	Storage temp.	(°C)	-40~85	
	Relative humidity	(%)	5~59	
Size			530×275×220	(W)×(D)×(H)

5.2 Uplink

Performance			Index	Supplement
Optical feature	Operating wavelength	(nm)	1310~1560	Typical application 1310nm
	Laser type		DFB	Option FP
	Output power	(dBm)	1	Option 2, 3, 4
	Optical return loss	(dB)	>55	
	Optical fiber connector		SC/APC	Option FC/APC
RF feature	Operating bandwidth	(MHz)	5~65	
	Input level	(dB μ V)	75~85	
	Flatness	(dB)	$\leq \pm 1.0$	
	Return loss	(dB)	≥ 16	
	Impedance	(Ω)	75	

5.3 Network management response part

Performance		Index	Supplement
Input frequency	(MHz)	112	108~119 optional
Output frequency	(MHz)	18	R5 frequency-band, 17.0~20.8MHz
Input level	(dBmV)	≥ 5	
Output level	(dBmV)	≥ 40	
Control output level range of downstream	(dB)	0~15	
Temperature test range	($^{\circ}$ C)	-40~85	

5.4 CWDM wavelength optional(return path Optical transmitter module)

ITU	ITU+1
1310nm	-
1470nm	1471nm
1490nm	1491nm
1510nm	1511nm
1530nm	1531nm
1550nm	1551nm
1570nm	1571nm
1590nm	1591nm
1610nm	1611nm